


JOB#

500-003

ACTUAL SIZE


SCALE: 4/1

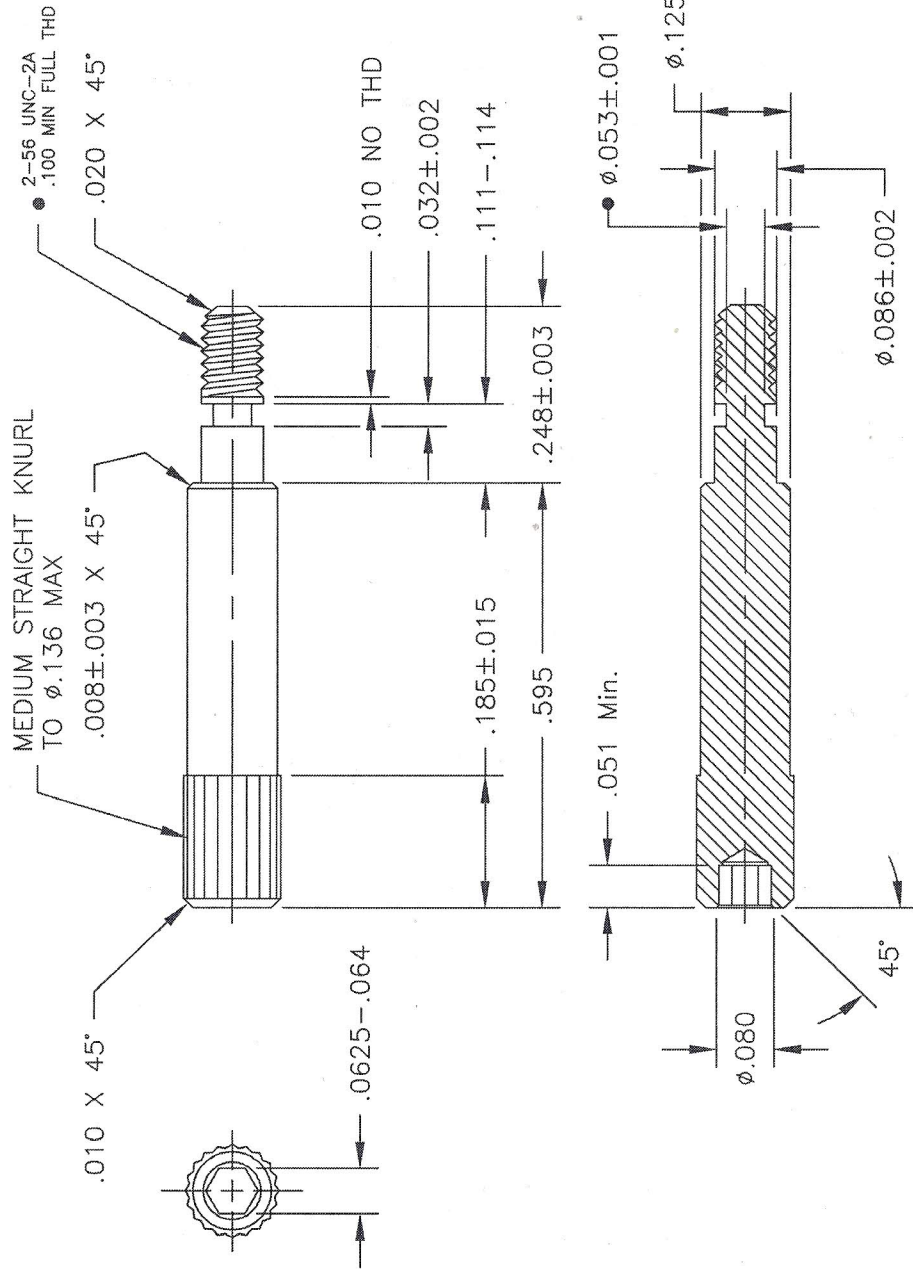

- ▶ CRITICAL CHARACTERISTIC SPC REQD (VARIABLE)
- MAJOR CHARACTERISTIC SPC REQD (ATTRIBUTE)

NOTES:

1. REMOVE ALL BURRS AND SHARP EDGES.
2. MATERIAL CONDITION/125,000 PSI MINIMUM TENSILE.

TITLE: HIGH-PROFILE, 2-56	
PART #: M83513/5-03	
REVISION: H	
MATERIAL: 303 SST (B) SEE NOTE 2	
FINISH: PASSIVATE SAE-AMS-2700	
PLATING: N/A	
TOLERANCES: .XX± .XXX± .005 ANGLE ± 3° FRACTION ± CONCENTRICITY: .003 TIR	
APPROVALS	DATE
DRAWN BY: M. FELKINS	99/10/25
CHECKED BY: C. DUBREUIL	11/02/99
Q.C. BY: J. FLOWERS	11/02/99
F/N: 500-003-A	
 HI-TECH SWISS ENGINEERING	